


LC3220

Combine project, cutting and picking up into one machine.

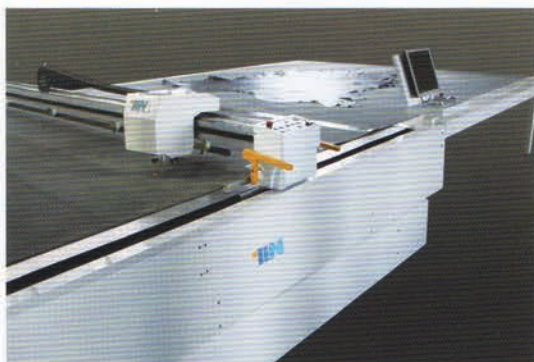

LC3230

LC3230 divided to three parts – project, cutting and picking up. Cutting leather by 0 gap.

Feature

- Servo platform scan adjusted automatically, accurate positioning cutting.
- Offline read leather and offline layout at the same time ,realize automatic cutting leather.
- Automatic cutting equipment, on-line computer operation, expediently to manage the leather cutting.

Technical parameter

Parameter	LC3220	LC3230
Dimensions(LxMxH)	5500x2780x1300(mm)	10500x3780x1300(mm)
Cutting area	3200x1800(mm)	3200x3000(mm)
Power supply	3 Phase 380V/50Hz/18KW	
Cutting thickness	0.5-6mm	
Position accuracy	0.01mm	
Repeated positioning accuracy	±0.05	
The maximum mechanical speed	60m/min	

*Machines can customize according to the actual needs of customers, but weight and outer contour size changes.